## TYPE APPROVAL CERTIFICATE

**DNV-GL** 

This is to certify that the undernoted product(s) has/have been tested in accordance with the relevant requirements of the DNV GL Type Approval System.

Certificate No.

13 656 - 14 HH

Company

igus GmbH

Spicher Str. 1a

51147 Köln, Germany

**Product Description** 

TPE insulated and PUR sheathed, flame retardant

chainflex data cables for shipboard and offshore applications,

especially for e-chain use

Type

CF112; CF211.PUR

**Environmental Category** 

None

Technical Data /

Rated voltage:

300 V

Range of Application

Max. operating conductor temperature: 90 °C (20.000h) Fine- wired copper strand, bare or tinned

Conductor: Insulation:

Inner jacket:

**PUR for CF112** 

Element shield:

Tinned copper wires for CF112

Overall shield: Tinned copper wires

Outer sheath:

PUR

Number of cores, cross-sectional area and properties

according to specification no.:

chainflex CF112; CF211.PUR

special properties mentioned on page 2 and 3

Test Standard

UL 758:2013; UL 1581:2011; IEC 60332-1-2:2004

UL Style: 20233

Documents

Test report : No.: 787 730 10 dated 27.02.2014

No.: 4909 dated 11.03.2014 No.: 3365 dated 26.05.2009

Remarks

This certificate is issued on the basis of GL Guidelines for the Performance of

Type Approvals, Chapter 1 - Procedure (VI-7-1), Edition 2007 and the

**GL Type Approval Procedure for Shipboard Cables.** 

Valid until 2021-03-13

Page

1 of 3

File No.

I.N.01

Hamburg, 2016-03-14

Type Approval Symbol

DNV GL

Schaarmann

### TYPE APPROVAL CERTIFICATE

**DNV-GL** 

This is to certify that the undernoted product(s) has/have been tested in accordance with the relevant requirements of the DNV GL Type Approval System.

Certificate No.

13 656 - 14 HH

The cables listed in this certificate are developed, tested and produced especially for continuously moving e-chain applications.

Apart from the qualities listed on page 1, the cables also fulfil the following special characteristics:

#### Explanation energy chain:

An energy chain (also e-chain, cable carrier or drag chain) is a component that guides and protects special flexible cables, pneumatic or hydraulic hoses.

You can find energy chains wherever moving machine parts need to be supplied with energy, data, liquids or gases.

#### Special characteristics cables

Due to the permanent bending and moving load of the cables in an energy chain, especially developed, tested and produced cables must have the following special properties:

- highly bending-resistant wires
- insulation materials with low mechanical aging due to bending load
- optimized pitch lengths stranding designs
- for shielded cables, highly bending-resistant braided shields with min. 80% optical coverage
- highly abrasion-resistant outer jacket materials
- highly bending-resistant outer jacket materials
- highly media, UV and ozone resistant outer jacket materials
- compact design for sufficient inherent rigidity (Not highly flexible!)
- have to withstand permanent bending tests in energy chains of min. 2-4 million double strokes (back and forth movement) without damage.
- undergo a minimum 15-20% batch production control through energy chain moving tests of at least 200.000 double strokes

#### Important note:

During the installation of cables in moving energy chains, special assembly and strain relief instructions have to be taken into account.

For further details check: www.igus.de

Valid until 2021-03-13

Page 2 of 3

File No. I.N.01

Hamburg, 2016-03-14

Type Approval Symbol

(GL

**DNV GL** 

Arne Schaarmann

Carsten Hunsalz


# TYPE APPROVAL CERTIFICATE

DNV-GL

This is to certify that the undernoted product(s) has/have been tested in accordance with the relevant requirements of the DNV GL Type Approval System.

Certificate No.

13 656 - 14 HH

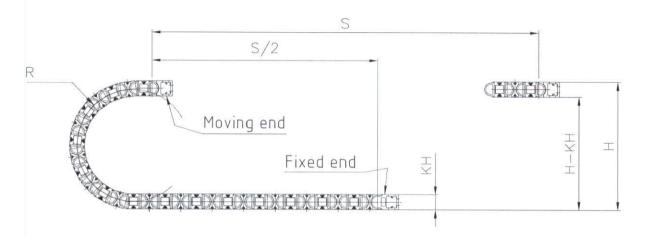

Properties according to specification no.:

chainflex

CF112 and CF211.PUR

Valid until 2021-03-13

Page

3 of 3

File No.

I.N.01

Hamburg, 2016-03-14

**DNV GL** 

Type Approval Symbol

Arne Schaarmann

Carsten Hunsalz